



Air Boss® T2600 Specifications


Top View

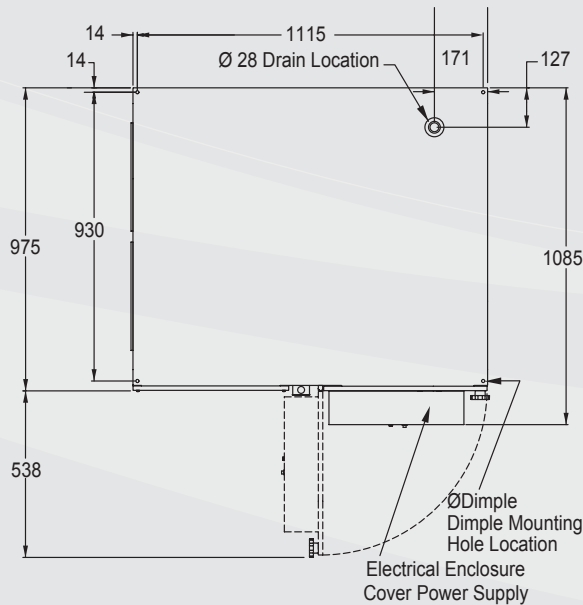


Discharge End

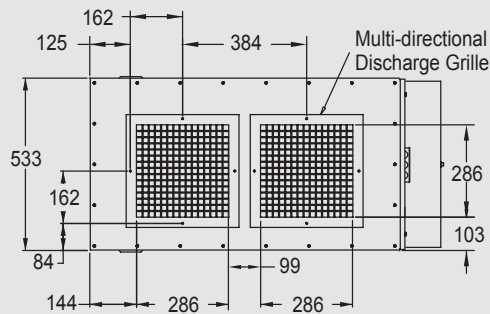

Front View

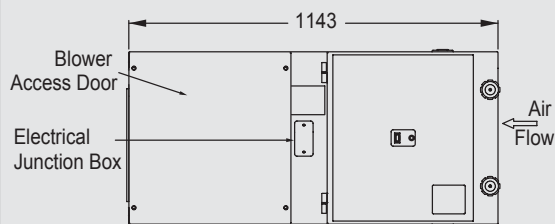

Intake End

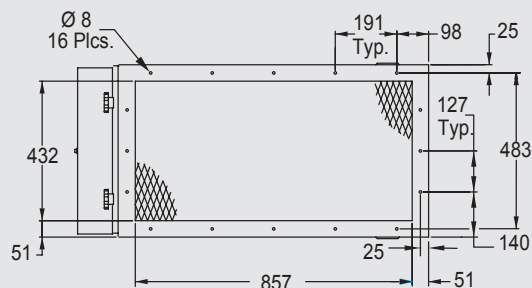

T2600

Dimensions	45" L x 43" W x 21" H				
Installation	Suspended, Wall, Frame Mounting				
Unit Weight	180 Lbs., Shipping Wt. 268 Lbs.				
Motor	TEFC, Sealed Ball Bearings, 1725 RPM, Thermal Protected Continuous Duty, U.L. Listed				
Motor Options	HP	Vac	Hz	Phase	Amp. Max
Standard	3/4	120/230	60	1	7
Option 1	1	208/230/460	60	3	3.4/1.7
Option 2	2	208/230/460	60	3	6.4/3.2
Blower	Belt Driven, Double Squirrel Cage, Forward Curved, with Sealed Ball Bearings				
Air Volume	Single Pass: 1,350 - 1,650 CFM Double Pass: 1,650 - 2,900 CFM Triple Pass: 3,000 Maximum CFM				
Efficiency	See chart on page 3				
Controls	On/Off Switch with Indicating Light Motor Starter (3 Phase Only)				
Sound Rating	71 DBA				
Pre-Filter (2) Required	Standard Aluminum Mesh: 18.4" L x 18.4" W x .88" D Optional Impingers				
Primary Filter (2) Required	Standard Forever Filter-Electronic Ionizer/Collector Cell Optional Bag Filters Optional Absorber Modules				
After Filter (2) Required	Optional Disposable Charcoal After Filter 18.4" W x 18.4" H x 1" D				
Power Supply	High Frequency Solid State Design				

Standard Specifications for Each Unit

Cabinet	16 Gauge Welded Galvanized Steel
Finish	Blue Epoxy Powder Coat
Air Flow	Horizontal — Standard Right to Left (Left to Right Option)
Accessories	Optional Source Capture Plenum Optional Brass Drain Fitting